





■ Features:

- Low cost.
- Wide range of inductance.
- Small mounting space required.
- Covered with PVC sleeve or UL tube.

■ Applications:


- TVs and Audio equipment.
- Person computer.
- Telecommunication devices.
- Switching Power Supply.

■ Parts code:

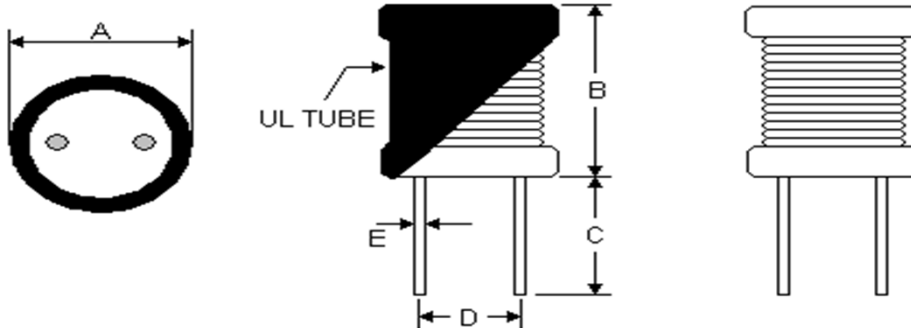

Dimensions in mm

TYPE	A (Max)	B (Max)	C (Min)	D (Ref)	E (±0.05)
DR 0406	5.5	8.0	10	2.0	0.60
DR 0608	7.5	10.0	10	3.0	0.65
DR 0810	10.5	12.5	10	5.0	0.65
DR 0912	11.5	14.0	10	5.0	0.80
DR 1012	12.0	15.0	10	6.0	0.80
DR 1016	12.0	18.0	10	6.0	0.80

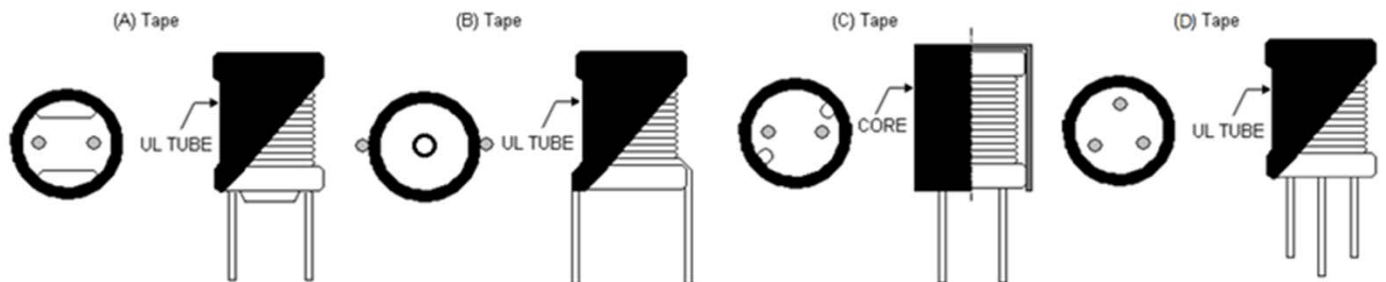

TYPE	TYPE	TYPE	TYPE
DR 0605DU	DRP 1621	DRH 1114	DR3P 0608
DR 0606DU	DRP 1820		DR3P 0810
DR 0805DU	DRP 2220		DR3P 0912
DR 0807DU	DRP 2828		
DR 0809DU	DRP 3533		

■ Specifications

Inductance		DR 0805DU	
		DC Resistance	Inductance Decrease Current
TYPE	uH	(Ω)	(A)
DR 0805DU-100 K	10	0.07	2.500
DR 0805DU-120 K	12	0.08	2.400
DR 0805DU-150 K	15	0.09	2.100
DR 0805DU-180 K	18	0.10	2.000
DR 0805DU-220 K	22	0.12	1.700
DR 0805DU-270 K	27	0.14	1.600
DR 0805DU-330 K	33	0.17	1.400
DR 0805DU-390 K	39	0.21	1.300
DR 0805DU-470 K	47	0.24	1.200
DR 0805DU-560 K	56	0.31	1.100
DR 0805DU-680 K	68	0.34	1.000
DR 0805DU-820 K	82	0.40	0.930
DR 0805DU-101 K	100	0.52	0.810
DR 0805DU-121 K	120	0.59	0.760
DR 0805DU-151 K	150	0.71	0.670
DR 0805DU-181 K	180	0.89	0.620
DR 0805DU-221 K	220	1.04	0.540
DR 0805DU-271 K	270	1.28	0.490
DR 0805DU-331 K	330	1.47	0.440
DR 0805DU-391 K	390	1.67	0.410
DR 0805DU-471 K	470	1.95	0.380
DR 0805DU-561 K	560	2.83	0.350
DR 0805DU-681 K	680	3.25	0.320
DR 0805DU-821 K	820	3.82	0.310
DR 0805DU-102 K	1000	5.28	0.250
DR 0805DU-122 K	1200	6.03	0.230
DR 0805DU-152 K	1500	7.15	0.210
DR 0805DU-182 K	1800	8.26	0.200
DR 0805DU-222 K	2200	11.10	0.180
DR 0805DU-272 K	2700	13.10	0.160
DR 0805DU-332 K	3300	15.90	0.140
DR 0805DU-392 K	3900	18.00	0.130
DR 0805DU-472 K	4700	23.90	0.120
DR 0805DU-562 K	5600	26.80	0.110
DR 0805DU-682 K	6800	31.70	0.098
DR 0805DU-822 K	8200	46.50	0.088
DR 0805DU-103 K	10000	55.70	0.081

- Notes:** 1. Test Frequency at 1KHz / 0.25V
 2. Tolerance: J(± 5%), K (± 10%) , M (± 20%)
 3. Operating Temp.: -40°C ~ +85°C