





■ Features:

- Low cost.
- Wide range of inductance.
- Small mounting space required.
- Covered with PVC sleeve or UL tube.

■ Applications:


- TVs and Audio equipment.
- Person computer.
- Telecommunication devices.
- Switching Power Supply.

■ Parts code:

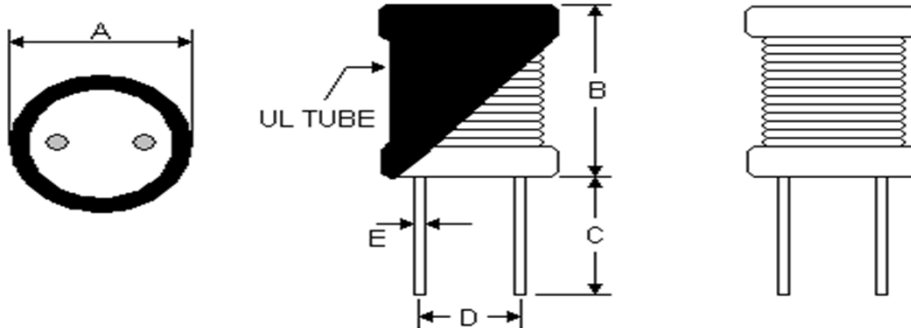

Dimensions in mm

TYPE	A (Max)	B (Max)	C (Min)	D (Ref)	E (±0.05)
DR 0406	5.5	8.0	10	2.0	0.60
DR 0608	7.5	10.0	10	3.0	0.65
DR 0810	10.5	12.5	10	5.0	0.65
DR 0912	11.5	14.0	10	5.0	0.80
DR 1012	12.0	15.0	10	6.0	0.80
DR 1016	12.0	18.0	10	6.0	0.80

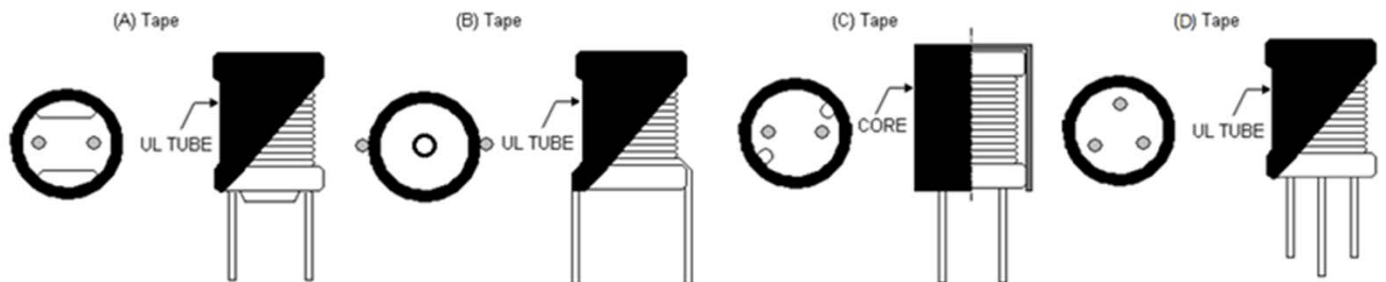

TYPE	TYPE	TYPE	TYPE
DR 0605DU	DRP 1621	DRH 1114	DR3P 0608
DR 0606DU	DRP 1820		DR3P 0810
DR 0805DU	DRP 2220		DR3P 0912
DR 0807DU	DRP 2828		
DR 0809DU	DRP 3533		

**Specifications**

Inductance		DR 0809DU	
		DC Resistance	Inductance Decrease Current
TYPE	uH	(Ω)	(A)
DR 0809DU-100 K	10	0.04	2.600
DR 0809DU-120 K	12	0.04	2.600
DR 0809DU-150 K	15	0.05	2.100
DR 0809DU-180 K	18	0.05	2.000
DR 0809DU-220 K	22	0.06	1.700
DR 0809DU-270 K	27	0.06	1.600
DR 0809DU-330 K	33	0.07	1.400
DR 0809DU-390 K	39	0.08	1.400
DR 0809DU-470 K	47	0.10	1.300
DR 0809DU-560 K	56	0.11	1.200
DR 0809DU-680 K	68	0.14	1.100
DR 0809DU-820 K	82	0.16	1.000
DR 0809DU-101 K	100	0.19	0.900
DR 0809DU-121 K	120	0.22	0.820
DR 0809DU-151 K	150	0.27	0.740
DR 0809DU-181 K	180	0.31	0.710
DR 0809DU-221 K	220	0.38	0.640
DR 0809DU-271 K	270	0.53	0.570
DR 0809DU-331 K	330	0.61	0.510
DR 0809DU-391 K	390	0.69	0.480
DR 0809DU-471 K	470	0.89	0.430
DR 0809DU-561 K	560	1.01	0.400
DR 0809DU-681 K	680	1.18	0.350
DR 0809DU-821 K	820	1.57	0.320
DR 0809DU-102 K	1000	1.84	0.300
DR 0809DU-122 K	1200	2.10	0.270
DR 0809DU-152 K	1500	2.80	0.230
DR 0809DU-182 K	1800	3.21	0.210
DR 0809DU-222 K	2200	4.21	0.190
DR 0809DU-272 K	2700	4.94	0.170
DR 0809DU-332 K	3300	6.16	0.150
DR 0809DU-392 K	3900	6.84	0.140
DR 0809DU-472 K	4700	7.89	0.130
DR 0809DU-562 K	5600	11.50	0.120
DR 0809DU-682 K	6800	13.20	0.110
DR 0809DU-822 K	8200	15.20	0.100
DR 0809DU-103 K	10000	22.00	0.089
DR 0809DU-123 K	12000	25.00	0.073
DR 0809DU-153 K	15000	29.10	0.068
DR 0809DU-183 K	18000	38.90	0.066
DR 0809DU-223 K	22000	44.90	0.059
DR 0809DU-273 K	27000	55.70	0.052
DR 0809DU-333 K	33000	64.20	0.048
DR 0809DU-393 K	39000	74.20	0.042
DR 0809DU-473 K	47000	96.40	0.038

- Notes:** 1. Test Frequency at 1KHz / 0.25V  
 2. Tolerance: J(± 5%), K(± 10%), M(± 20%)  
 3. Operating Temp.: -40°C ~ +85°C